

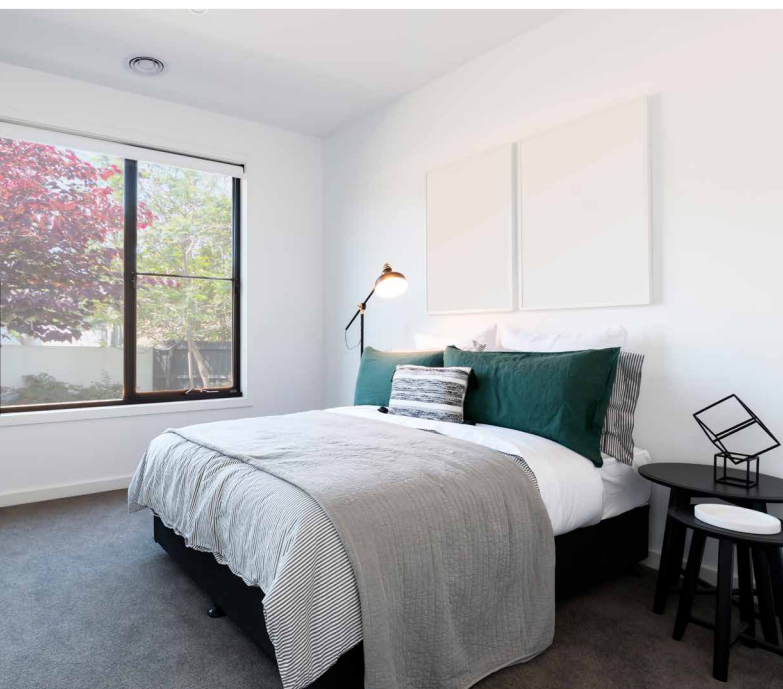


Central Heating and Ventilation

Highly Efficient Ducted Heating, Cooling and Ventilation

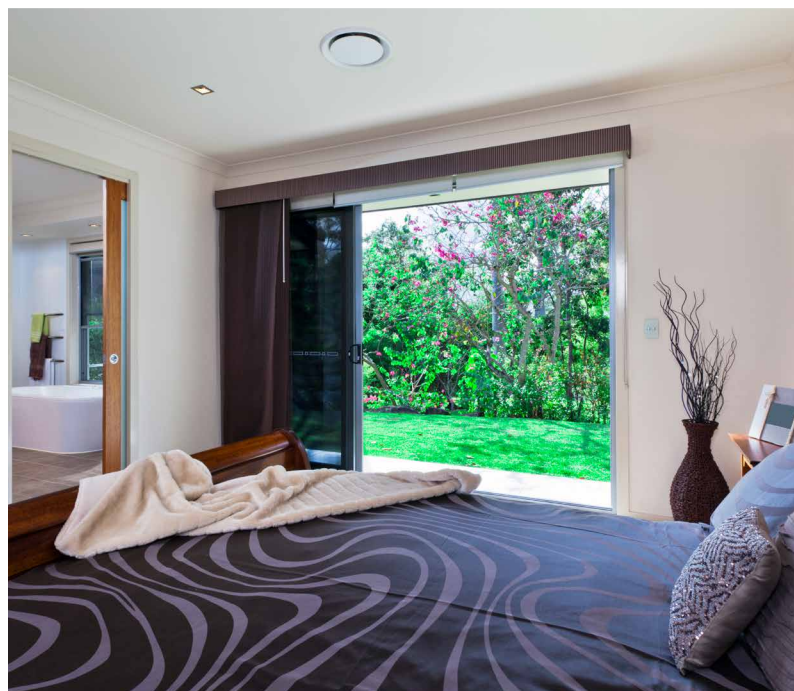

Quiet, Unobtrusive Comfort for Your Whole Home

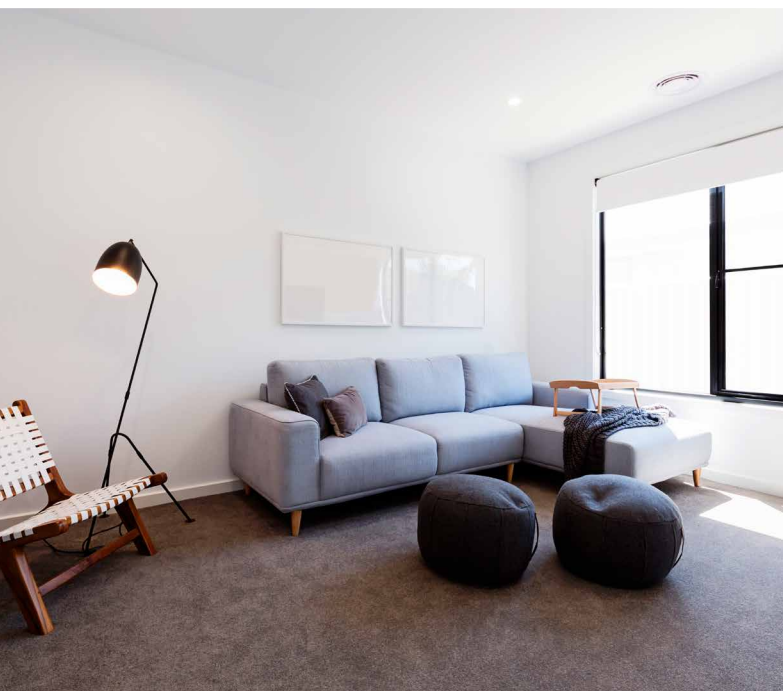

Efficient Comfort for Your Whole Home

Ducted Heat Pumps

Heat or Cool Your Whole Home with a Ducted Heat Pump System.

Mitsubishi Electric Ducted Heat Pump Systems are the ultimate solution for unobtrusive, whole home comfort. Designed for easy installation in ceiling or bulkhead spaces, ducted heat pumps are hidden from view, with only subtle grilles visible. Using concealed ducting to connect multiple rooms for heating or cooling, these systems are ideal for residential or commercial applications.

Why Choose Heat Pump Technology?



Deluxe Weekly Controller

This attractive full dot liquid crystal display incorporates a large backlit screen and simple menus for easy operation. You can set up to eight temperature and airflow patterns per day for seven days, maximising energy efficient operation – saving you both time and money.




Discreet Ducted Design

With only subtle grilles visible, a ducted system lets your interior design style take centre stage. Not only does a ducted system provide a whole home heating or cooling solution, it offers a sleek installation for the design-conscious.



Wi-Fi Control Upgrade

With the addition of award-winning Mitsubishi Electric Wi-Fi Control, you can control and monitor your heat pump from absolutely anywhere via your smartphone, tablet or online account.



Convenient Comfort

Heat pumps move warm air throughout the room, meaning you no longer need to rearrange your furniture around your heat source. Heat pumps also allow comfort at the touch of a button – there's no manual tasks such as cutting or stacking firewood.



Optional Zone Controller Upgrade

With the ability to control up to eight zones, expanded functionality and interaction, intuitive airflow control, and temperature, occupancy and brightness sensors – the PAC-ZC Zone Controller brings intuitive, yet simple control to a whole new level.



Grille Options

Mitsubishi Electric Ducted Heat Pump Systems allow for a wide range of grille options to best suit your installation needs. From ceiling and wall installations, to underfloor grille options, talk to your installer about what's right for you.




Healthy, Fresh Air Ventilation

Lossnay Fresh Air Ventilation

Balanced Pressure Heat Recovery Ventilation Benefits

Ventilating your home is vital as it maintains air quality and reduces moisture, creating a healthier and more comfortable environment. Mitsubishi Electric Lossnay is a patented heat recovery ventilation solution that uses fresh air (not attic air) to ventilate your home. The system recovers heat energy from the outgoing stale air from inside your house, and replaces it with allergen-reduced fresh air from outside.



Improved Air Quality

By drawing in fresh outdoor air, indoor air quality is improved as high levels of CO₂, odours and other pollutants are removed from your home.




Creates a Healthier Home

Filtered fresh air improves air quality for allergy and asthma sufferers.



Fresh Air Without Windows Open

Lossnay allows you to have a well-ventilated home without the need to open windows. This improves the safety of your home and minimises outdoor noise.



Energy Efficient

Incoming fresh air is prewarmed so your heating system isn't required to work as hard to reach desired temperatures. This is highly energy efficient, and can help reduce heating bills.



Retains Heat

Lossnay's unique Heat Recovery Technology collects up to 86% of the heat energy in outgoing air which is then used to prewarm or cool the fresh air vented in.



Assists Moisture and Condensation Control

Lossnay effectively controls moisture in your home by directly removing stale air that causes condensation via the Lossnay Core.



Balanced Pressure, No Draughts

Lossnay is specifically designed for more airtight homes built to the current New Zealand Building Code; bringing in the optimum amount of fresh air without creating draughts and minimising indoor temperature fluctuations.



Quietest in its Class

At an ultra quiet 14dBA on low fan speed, the Lossnay VL220 is the quietest system in its class.




Maximised Comfort All Year Round

Whole Home Heating and Ventilation

Maximise Comfort by Combining Your Ducted System With Lossnay Ventilation

Mitsubishi Electric Lossnay Ventilation can be integrated with a PEAD Ducted Heat Pump System offering a complete home heating, cooling and ventilation solution*.

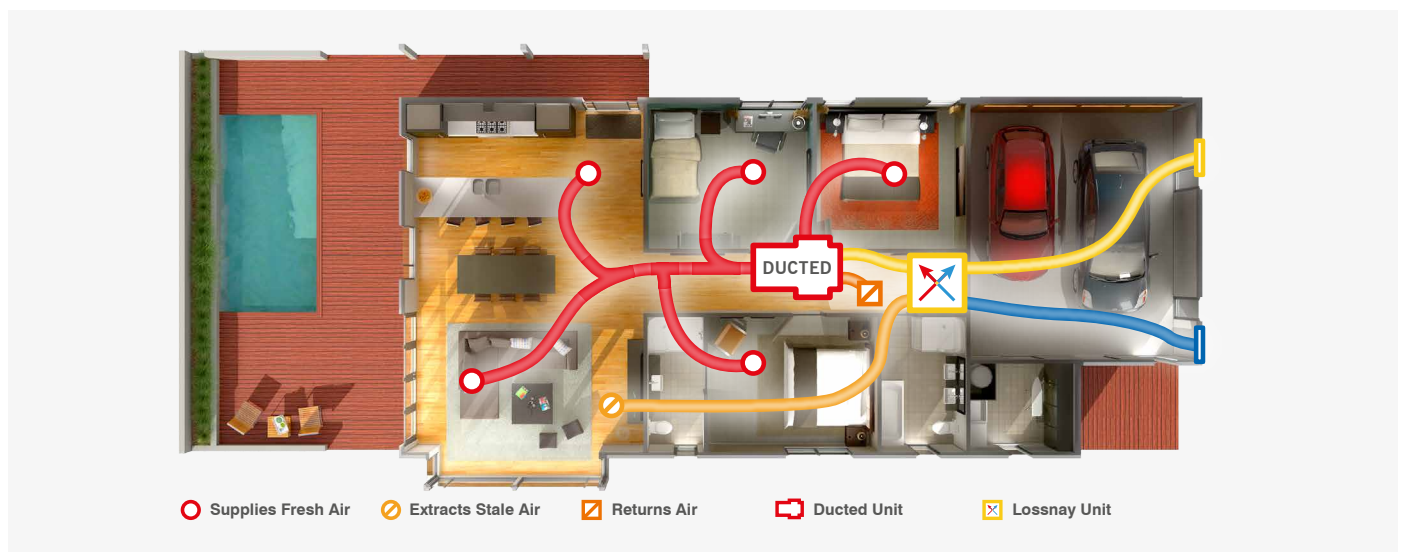

The Lossnay Ventilation System recovers energy from the stale, damp air it extracts from your home – and then uses that energy to pre-warm or pre-cool the incoming filtered fresh air. This means that when Lossnay is combined with your ducted system*, your home can be brought to the desired temperature faster because the heating system is not required to work as hard to do so.

By having a well-ventilated home the air is also much drier, further speeding up the efficient heating process. In addition, because fresh air is brought in from the outside and not from the attic, air quality is maximised.

When these two systems are combined to work together, it will ultimately create a drier, healthier environment for you and your family.


	Heat Pump	Ventilation	Ducted Heat Pump + Ventilation
Heating/Cooling	✓	-	✓
Fresh Outside Air	-	✓	✓
Filtered Air (dust etc. removed)	✓	✓	✓
Energy Efficient	✓	✓	✓
Energy Recovery (Heat Exchange)	-	✓	✓

*To run the Lossnay unit by itself when heating/cooling is not required, the ducted unit needs to be operating in fan mode.



Whole Home Comfort

Ducted Central Heating

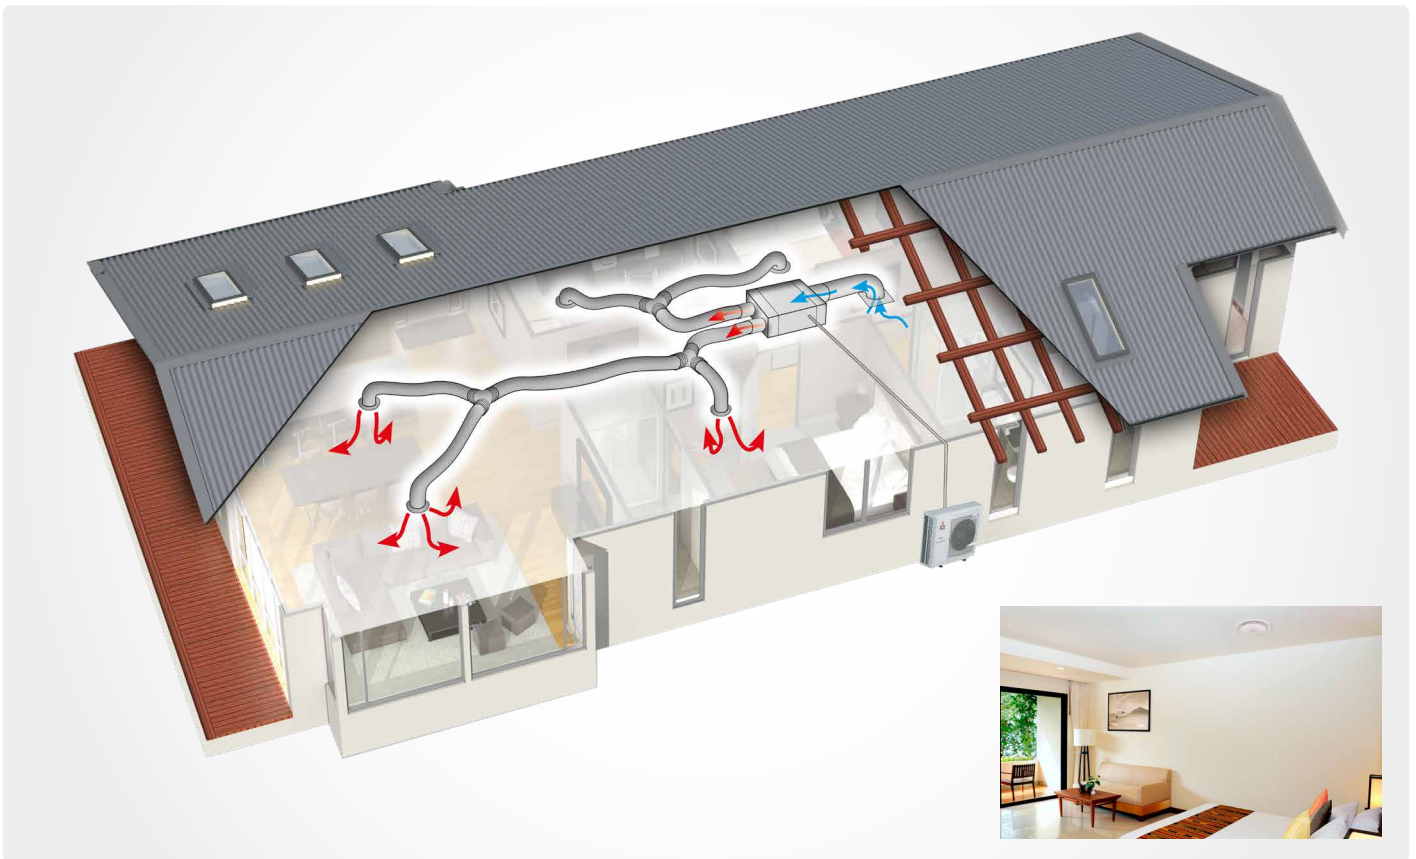

How Do Ducted Heat Pumps Work?

Ducted systems combine the efficiency and convenience of heat pump technology into a whole home solution. Through installation of a ducted heat pump into a ceiling or bulkhead space, multiple rooms can be connected for heating and cooling, making this the ideal system for residential or commercial applications. Using concealed ducting, this product is hidden from view with only subtle grilles visible.

Mitsubishi Electric provides the ultimate ducted heat pump solutions for unobtrusive, whole home comfort. The PEAD Ducted Range incorporates superior Mitsubishi Electric High Wall Heat Pump technology to provide quietness and efficiency.

Installation is simple with Mitsubishi Electric indoor units. A slim design means low ceilings and minimal clearance space is no issue and the possibilities are endless. This makes Mitsubishi Electric PEAD Ducted Systems perfect for a wide range of variations in airflow settings and cost-effective heating and cooling of your home. They are also the answer to commercial building airflow requirements.

Ducted Central Heating

Specifications: Ceiling-Concealed (PEAD)

REFRIGERANT		R32							
Indoor Unit		PEAD-M71JAA		PEAD-M100JAA		PEAD-M125JAA		PEAD-M140JAA	
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)	7.1 (2.8-8.1)	8.0 (2.6-10.2)	10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	14.0 (6.2-15.3)	16.0 (5.7-18.0)
Power Input	(kW)	1.98	2.00	2.67	2.80	3.66	3.52	4.37	4.18
Rated EER/COP		3.58	4.00	3.74	4.00	3.41	3.97	3.20	3.82
Rated AEER/ACOP		3.53	3.93	3.60	3.86	3.32	3.86	3.13	3.73
Power Supply Outdoor Unit		230V, Single-phase, 50Hz							
Airflow	(m³/h)	1051-1260-1501		1440-1738-2041		1771-2131-2520		1918-2340-2761	
	(L/S)	292-350-417		400-483-567		492-592-700		533-650-767	
External Static Pressure	(Pa)	35/50/70/100/125							
Sound Pressure Level	(dBA)	30-33-38		33-38-42		36-40-44		40-44-49	
Dimensions W x D x H	(mm)	1,100 x 732 x 250		1,400 x 732 x 250		1,400 x 732 x 250		1,600 x 732 x 250	
Weight	(kg)	30		39		40		44	
Outdoor Unit		SUZ-M71VAD		PUZ-ZM100VKA		PUZ-ZM125VKA		PUZ-ZM140VKA	
Dimensions	Height (mm)	880		1338		1338		1338	
	Width (mm)	840		1050		1050		1050	
	Depth (mm)	330		330		330		330	
Weight	(kg)	55		111		111		111	
Operation Range Outdoor	Cooling [°C]	-15 / 52		-5 / 52		-5 / 52		-5 / 52	
	Heating [°C]	-15 / 24		-20 / 21		-20 / 21		-20 / 21	

Fresh Air Home Ventilation

Series	Domestic VL-220CZGV-E	LGH Range
Heat Exchanger Core Technology	Heat Recovery <i>Can recover heat or cooling energy from extracted room air and also heat energy from wet areas such as bathrooms and kitchens.</i>	Energy Recovery <i>Can recover heat or cooling energy from extracted room air only.</i>
Extract Air from Wet Areas	<i>Can recover heat from wet areas such as bathrooms and kitchens.</i>	No

Specifications: Fresh Air Home Ventilation

Type	Heat Recovery Balanced Pressure Ventilator				Energy Recovery Balanced Pressure Ventilator				Energy Recovery Balanced Pressure Ventilator			
Model	VL-220CZGV-E				LGH-35RVX-E				LGH-50RVX-E			
Ventilation Modes	Heat Recovery Mode, Bypass Ventilation Mode (optional damper P-133DUE-E required)				Energy Recovery Mode, Bypass Ventilation Mode				Energy Recovery Mode, Bypass Ventilation Mode			
Heat Exchange System	Air to Air Sensible Heat Exchanger				Air to Air Sensible and Latent Heat Exchanger				Air to Air Sensible and Latent Heat Exchanger			
Heat Exchange Material	Specially Treated Non-Permeable Resin Core				Specially Treated Permeable Paper Core				Specially Treated Permeable Paper Core			
Surrounding Air Condition	Between 0°C and 40°C, 80%RH or less				Between -10°C and 40°C, 80%RH or less				Between -10°C and 40°C, 80%RH or less			
Return (Suction) Air Condition	Up to 40°C, 95%RH				Up to 40°C, 80%RH				Up to 40°C, 80%RH			
Supply Fan Operation Under Low Outdoor Temperature	0°C to -5°C: Intermittent operation 24 min ON, 6 min OFF. -5°C or less: Continuous supply air stopped.				-10°C to -15°C: Intermittent operation 60 min ON, 10 min OFF. -15°C or less: Intermittent operation 55min OFF, 5 min ON.				-10°C to -15°C: Intermittent operation 60 min ON, 10 min OFF. -15°C or less: Intermittent operation 55min OFF, 5 min ON.			
Electrical Power Supply	220-240V / 50Hz				220-240V / 50Hz				220-240V / 50Hz			
Fan Speed	Fan Speed 4	Fan Speed 3	Fan Speed 2	Fan Speed 1	Fan Speed 4	Fan Speed 3	Fan Speed 2	Fan Speed 1	Fan Speed 4	Fan Speed 3	Fan Speed 2	Fan Speed 1
Input Power (W)	80	35	18.5	8.5	140	70	31	11	165	78	32	12
Air Volume - Heat Recovery Mode (m³/h)	230	165	120	65	350	263	175	88	500	375	250	125
	(l/s)	64	46	33	18	97	73	49	24	139	104	35
External Static Pressure (Pa)	164	84	44	13	160	90	40	10	120	68	30	8
Temperature Exchange Efficiency (%)	82	84	85	86	80	82.5	86	88.5	78	81	83.5	87
Noise (dBA) (Measured at 1.5m under the centre of the unit in an anechoic chamber)	31	25	19	14	32	28	20	17	34	28	19	18
Duct Size (mm)	150				150				200			
Interlock Cable Included (CN2L)	No				Yes				Yes			
Dimensions W x D x H (mm)	850 x 720 x 320				888 x 874 x 331				888 x 1016 x 331			
Weight (kg)	31				30				33			

* Other models of the LGH Range available (air volume from 38-2,000 m³/h).



Black Diamond Technologies Limited



Exclusive New Zealand Partner Since 1981



Wellington

Head Office
1 Parliament Street
PO Box 30772
Lower Hutt 5040

Phone 04 560 9147

Auckland

Unit 1 / 4 Walls Road
PO Box 12726
Penrose
Auckland 1642

Phone 09 526 9347

Christchurch

44 Halwyn Drive
PO Box 16904
Hornby
Christchurch 8441

Phone 03 341 2837



For more information on Central Heating and Ventilation please visit our website or call our Customer Service Team.

www.mitsubishi-electric.co.nz | 0800 784 382